

PVC Coated Weatherproof Lagging



PVC Coated External Grade Insulation. External pipework needs to be insulated in a tough PVC coated weather protected covering to avoid UV degradation and animal damage.

- UV resistant
- Weather resistant
- Oil/Grease resistant
- Greater resistance to animal damage such as birds

BIRD PECKED LAGGING




Available in 2 wall thicknesses:

1/2"
(13mm)
Wall

3/4"
(19mm)
Wall

UV/SUN DAMAGED LAGGING

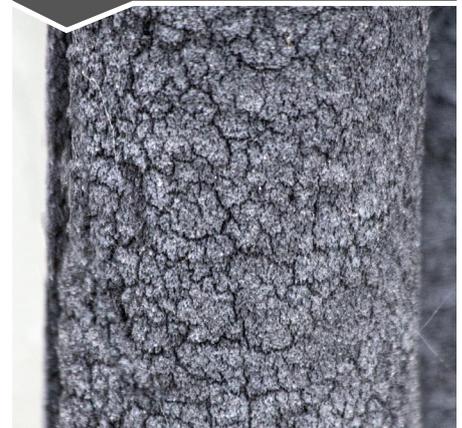

Essential Features	Performance
Thickness	≤0.33mm ±0.1mm
Operating Surface Temperature	80°C +/-40°C
UV Resistance	Very Good
Weather Resistance	Very Good
Oil/Grease Resistance	Very Good
Elongation at Breaks	<250%
Colour	Black
Size Range 1/2" Wall	1/8" (6mm), 3/16" (10mm), 1/4" (12mm), 5/16" (15mm), 3/8" (20mm), 7/16" (22mm), 1" (25mm), 1 1/8" (28mm), 1 1/4" (35mm)
Size Range 3/4" Wall	7/16" (22mm), 1 1/8" (28mm), 1 1/4" (35mm)

T. 01206 864 467
sales@greenmillac.com
www.greenmillac.com

