

Medium Duty Return Flange Reducer Pre Galv

Standard:

BS EN 61537 Cable Management – cable tray systems and cable ladder systems.

Material and Finishes:

Mild steel pre-galvanised PG.



PG Manufactured from pre galvanised mild steel complying with BS EN 10346 with a typical zinc coating of 20µm.

Product information:

STÖRNCH cable tray systems are usually assembled using M6 roofing bolts to a torque setting of 12N/m.



Code	Width 1 mm	Width 2 mm	Height mm	Gauge mm
GMSCT37	150	100	25.9	0.9
GMSCT38	225	150	26.0	1.0
GMSCT44	300	100	26.0	1.0
GMSCT45	300	150	26.0	1.0
GMSCT39	300	225	26.0	1.0
GMSCT46	450	150	26.0	1.0
GMSCT40	450	300	26.0	1.0
GMSCT41	600	450	26.2	1.2

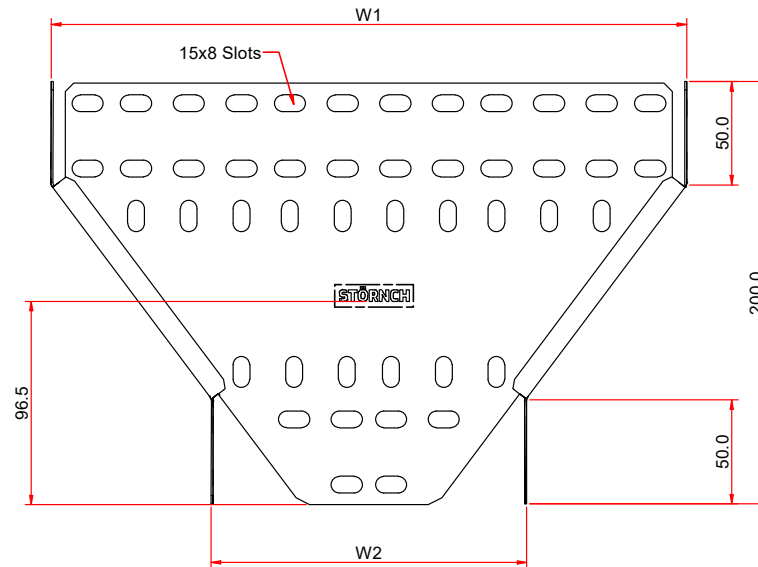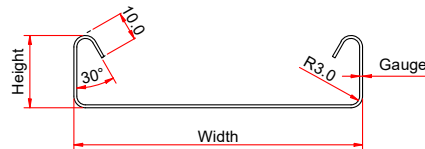

The information in this datasheet is intended for reference purposes only and may be modified at any time without prior notice or obligation. All data is provided in good faith and is accurate to the best of our knowledge at the time of release.