


▶ Medium Duty Cable Tray Wrapover Coupler Pre Galv & Hot Dip Galv

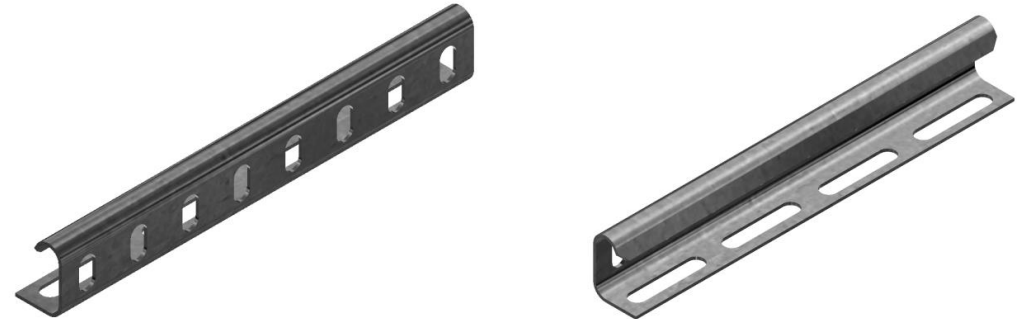

Standard:

BS EN 61537 Cable Management – cable tray systems and cable ladder systems.

Material and Finishes:

Mild steel pre-galvanised PG & Hot Dip Galv HDG

PG: Manufactured from pre galvanised mild steel complying with BS EN 10346 with a typical zinc coating of 20µm.

HDG: Manufactured from mild steel complying with BS EN 10130 and hot dip galvanised after manufacture to BS EN ISO 1461 to a mean zinc coating thickness (minimum) of 45µm.

Product information:

STÖRNCH cable tray systems are usually assembled using M6 roofing bolts to a torque setting of 12N/m.

Code	Length mm	Weight kg	Qty/Pk
GMSCT8W	200	0.22	Pairs
GMSDCT8W	200	0.22	Pairs

The information in this datasheet is intended for reference purposes only and may be modified at any time without prior notice or obligation. All data is provided in good faith and is accurate to the best of our knowledge at the time of release.