

# Medium Duty Return Flange Tee Pre Galv

**Standard:**

BS EN 61537 Cable Management – cable tray systems and cable ladder systems.


**Material and Finishes:**

Mild steel pre-galvanised PG.



PG Manufactured from pre galvanised mild steel complying with BS EN 10346 with a typical zinc coating of 20µm.

**Product information:**

STÖRNCH cable tray systems are usually assembled using M6 roofing bolts to a torque setting of 12N/m.

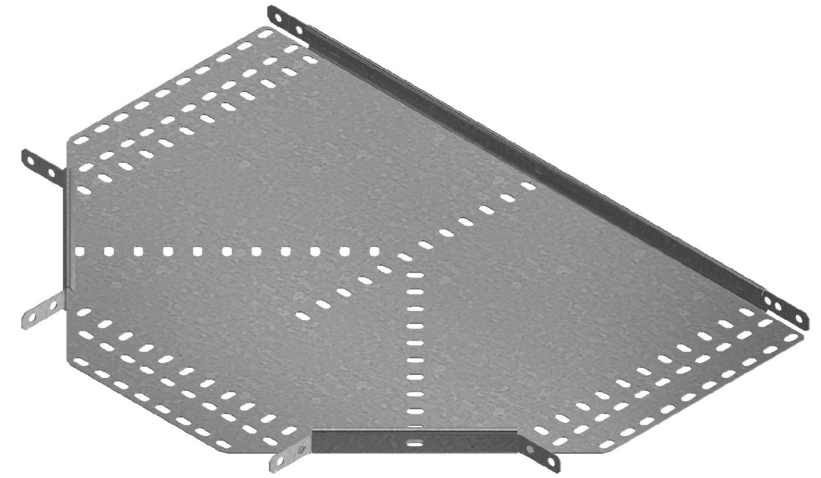

Code	Width mm	Length mm	Height mm	Gauge mm	Weight Kg
GMSCT28	100	350	25.9	0.9	0.71
GMSCT29	150	400	25.9	0.9	1.01
GMSCT30	225	475	26.0	1.0	1.67
GMSCT31	300	550	26.0	1.0	2.32
GMSCT32	450	700	26.0	1.0	3.88
GMSCT33	600	850	26.2	1.2	6.95

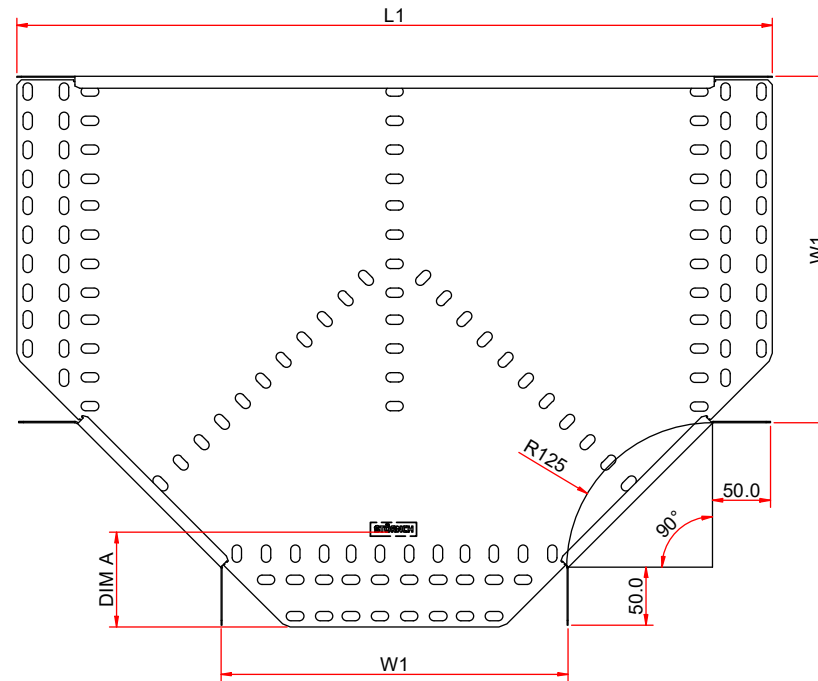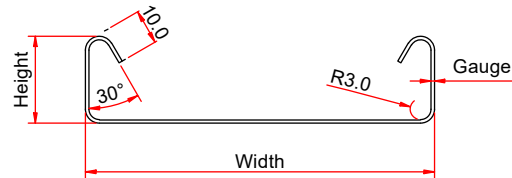

The information in this datasheet is intended for reference purposes only and may be modified at any time without prior notice or obligation. All data is provided in good faith and is accurate to the best of our knowledge at the time of release.