Heavy Duty Return Flange 90º Bends Pre Galv

Standard:
BS EN 61537 Cable Management – cable tray systems and cable ladder systems.
Material and Finishes:
Mild steel pre-galvanised PG.
PG Manufactured from pre galvanised mild steel complying with BS EN 10346 with a typical zinc coating of 20µm.
Product information:
STÖRNCH cable tray systems are usually assembled using M6 roofing bolts to a torque setting of 12N/m.

Code	Width mm	Length mm	Height mm	Gauge mm	Weight Kg
GMSHCTB90100	100	225	50.9	0.9	0.58
GMSHCTB90150	150	275	50.9	0.9	0.80
GMSHCTB90225	225	350	51.0	1.0	1.31
GMSHCTB90300	300	425	51.0	1.0	1.81
GMSHCTB90450	450	575	51.2	1.2	3.62
GMSHCTB90600	600	725	51.2	1.2	5.44

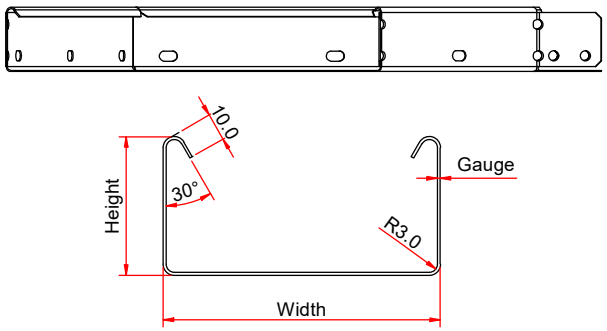

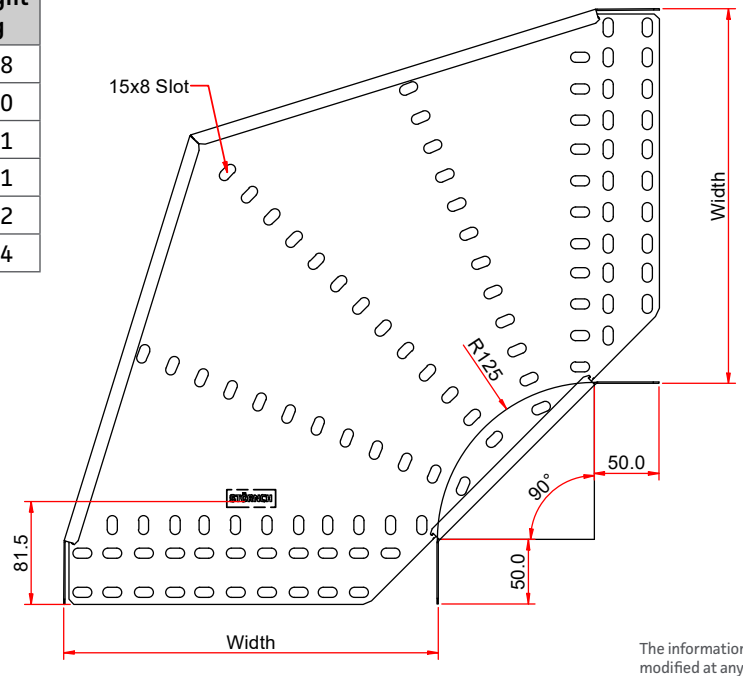

The information in this datasheet is intended for reference purposes only and may be modified at any time without prior notice or obligation. All data is provided in good faith and is accurate to the best of our knowledge at the time of release.

STÖRNCH Cable Tray